


→ Nagano 15TJC

Crawler type
Telescopic boom lift

FEATURES

- ✓ Low emission
- ✓ Allowable tilt 5°
- ✓ Total range traveling
- ✓ Overload sensing
- ✓ Wide platform (6ft)
- ✓ Lighting system (option)

| MODEL | 15TJC |
|------------------------------------|------------------------|
| Platform capacity | 250 kg |
| Allowable tilt | 5° |
| Platform dimensions (W x L x H) | 1,770 x 730 x 1,100 mm |
| Platform height (max) | 12,778 mm |
| Horizontal reach (max) | 11,182 mm |
| Machine weight | 9,000 kg |
| Overall length | 8,266 mm |
| Overall width | 2,250 mm |
| Overall height | 2,305 mm |
| Engine model | KUBOTA D1305 |
| Travel speeds | 0.9/1.5/2.7 km/h |

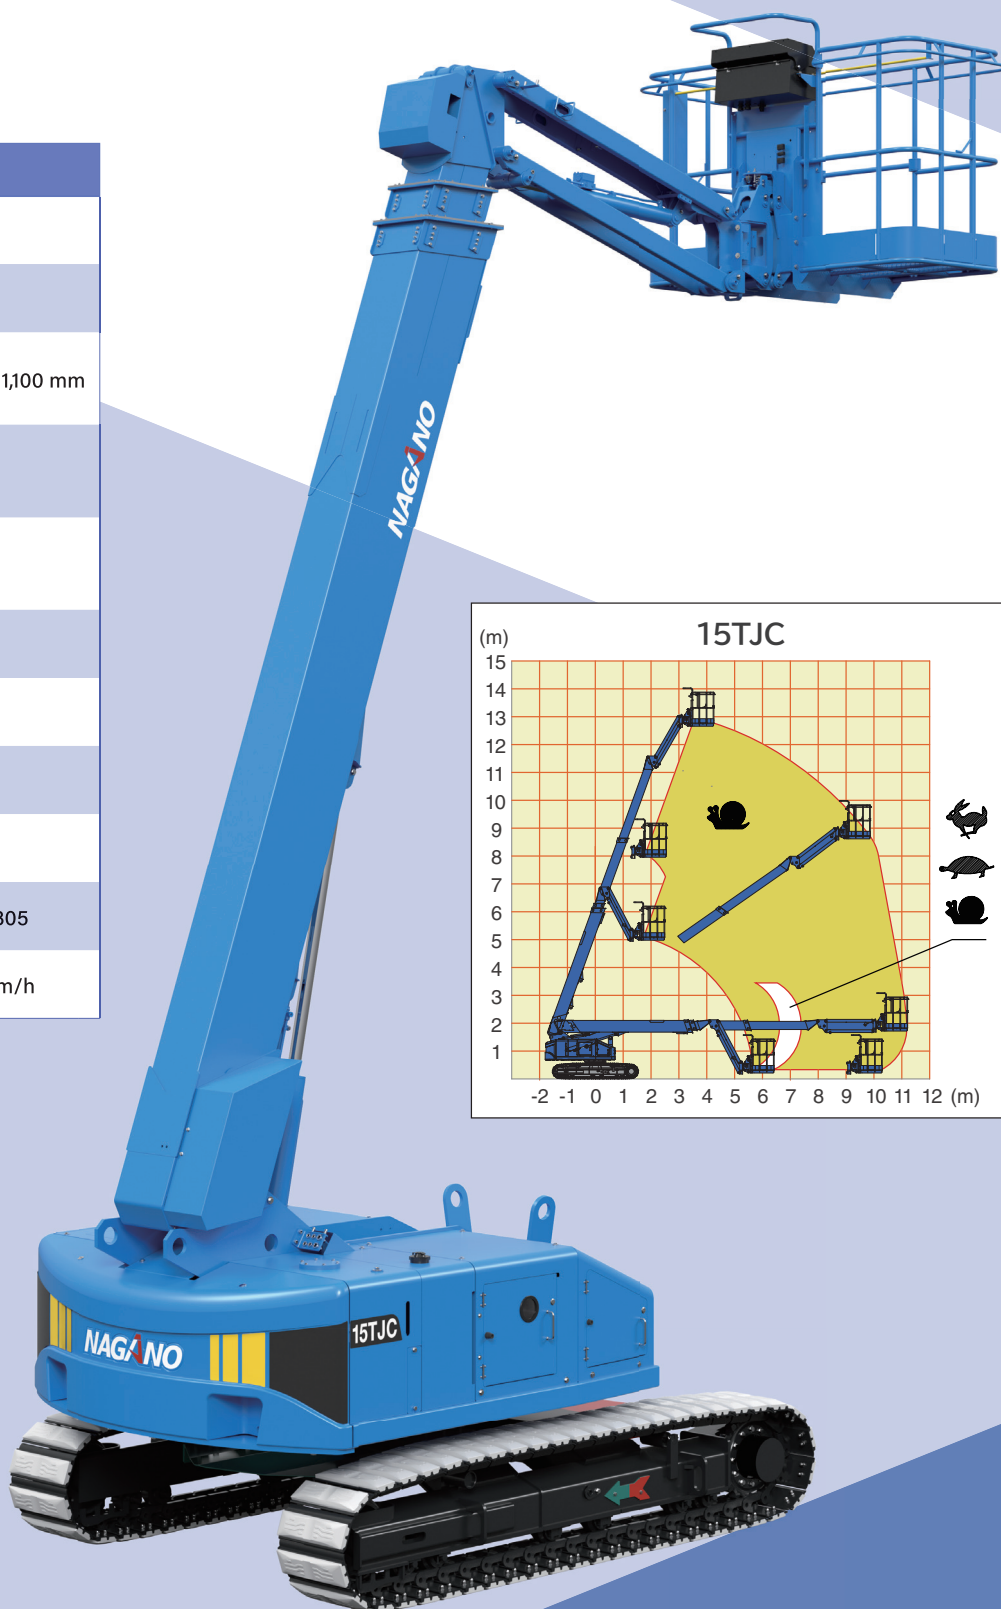

Lifting the machine

- ⚠ Use only qualified rigging to hoist the machine.
- ⚠ Be sure that lifting devices and crane are sufficient to withstand the machine weight.
- Ensure the boom is in stowed position before lifting.
- Determine the center of gravity of the machine as shown below.
- Attach the rigging to designated lifting rings on the machine.
- Insert protective materials where rigging may interfere with the machine.

