


→ NUL12-7


Crawler type
Articulated boom lift

FEATURES

- ✓ Low emission
- ✓ Allowable tilt 5°
- ✓ Operation restriction (slope)
- ✓ Overload sensing

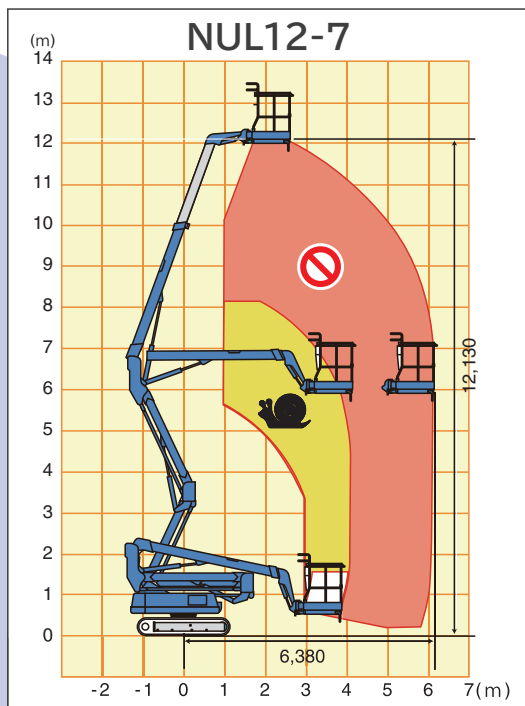

TYPE	NUL12-7
Platform capacity	200 kg
Allowable tilt	5°
Platform dimensions (W x L x H)	1,130 x 730 x 1,000 mm
Platform height (max)	12,130 mm
Horizontal reach	6,380 mm
Machine weight	5,150 kg
Overall length	5,570 mm
Overall width	2,050 mm
Overall height	2,440 mm
Engine model	KUBOTA D1305
Travel speeds	0.7/1.3 km/h

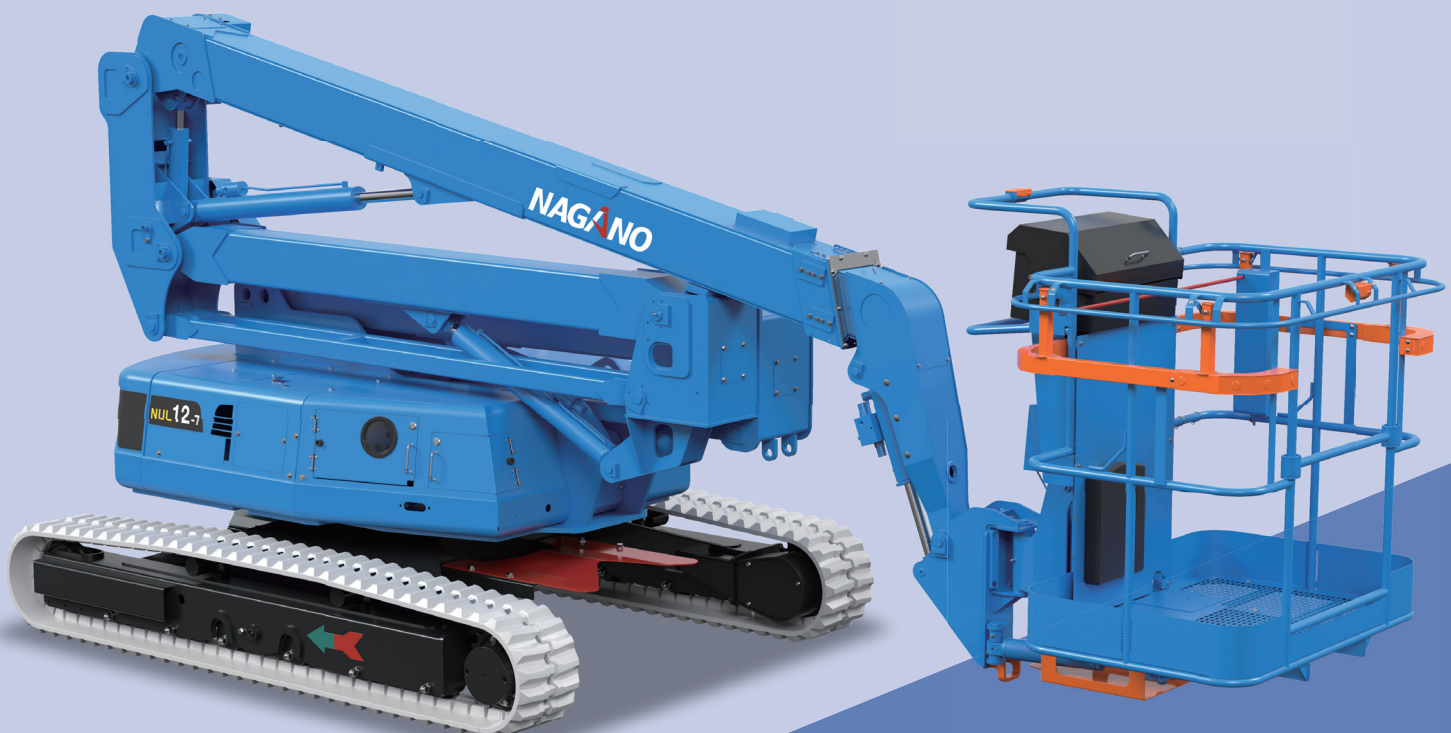

Lifting the machine

- ⚠ Use only qualified rigging to hoist the machine.
- ⚠ Be sure that lifting devices and crane are sufficient to withstand the machine weight.
- Ensure the boom is in stowed position before lifting.
- Determine the center of gravity of the machine as shown below.
- Attach the rigging to designated lifting rings on the machine.
- Insert protective materials where rigging may interfere with the machine.

